


Product specification

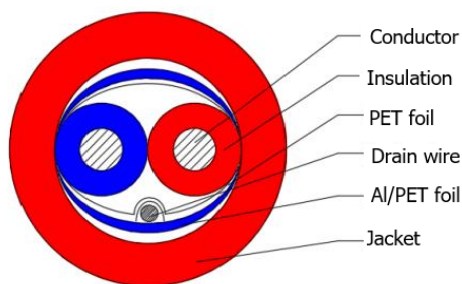

一、Technical parameter

Type	Fire Resistant Cable 2C×1.5mm ²
Specification	EN50200
Conductor	
Conductor material	BC
Conductor Construction (mm)	1.36±0.02
Insulation	
Insulation material	silicone rubber
Insulation diameter(mm)	2.5±0.1
Average Thickness (mm)	0.50
Min Thickness (mm)	0.45
Color	Red,Blue
Wrapping tape	
Wrapping tape material	PET foil
Drain wire	
Drain wire material	TC
Drain wire size	1×0.5±0.01
shield	
Shield material	AL/PET
Rid cord	
Rid cord	Yes
Jacket	
Jacket material	LSZH
Jacket Diameter(mm)	7.2±0.3
Average Thickness (mm)	0.75
Min Thickness (mm)	0.65
Color	Red

Type	Fire Resistant Cable 2C×1.5mm ²
Specification	EN50200
Electrical & Physical Characteristics:	
Conductor DCR 20°C	≤12.5 Ω/KM
Rated Voltage	300/300V
Fire Retardant	IEC60332-1-2
Smoke Density	BS EN 61034-2
Acidity and Conductivity	BS EN 60754-2
Fire Resistant	PH120
Operating Temperature Range	- 20° C ~90° C

Package

200m/wooden reel or other lengths, according to customers need.

